

122 Keyboard AS/400  
Low Cost Printing  
Ethernet TN5250e iSeries TN3270e TCP/IP  
Windows CE

## I-O 3235 IPDS DIMM/Flash



DIMM



Flash

The I-O 3235 IPDS DIMM/Flash allows an HP LaserJet to print full function IBM Host AFP/IPDS print jobs over an Ethernet LAN. Specifically designed for HP printers, the I-O 3235 efficiently converts AFP/IPDS to PCL5e. Whether printing from a Windows/Unix based system or an IBM Host environment, the I-O 3235 offers the best of both worlds.

I-O has combined its extensive experience in IBM host connectivity with HP's I/O Filter technology to provide a solution that allows HP printers to print AFP/IPDS host print jobs via TCP/IP. The I-O 3235 is compatible with HP Jetdirect enabled printers, offering the benefit of management tools provided by Web Jetadmin.

Easy to install and configure, the I-O 3235 IPDS DIMM/Flash is simply inserted in the HP printer. Set-up and configuration are easily handled through the printer's front control panel or Web page.



I-O 3235 IPDS DIMM/Flash

business partner



# I-O 3235 IPDS DIMM/Flash

## Technical Specifications

### For AS/400, iSeries, eServer i5

- **IPDS Emulations**  
IBM 4028 AS1, 3812-2, 3816-1D/S  
(includes 4312/17 font support)
- **AFP/IPDS Towers**  
Supports all towers
- **System Requirements**  
OS/400 Release 3.1 or higher;  
PSF/400

### For S/390 – zSeries

- **IPDS Emulations**  
IBM 4028 AS1, 3812-2, 3816-1D/S  
(includes 4312/17 font support)
- **AFP/IPDS Towers**  
Supports all towers
- **System Requirements for OS/390 or MVS**  
PSF/MVS Version 2.2.0 with APR  
OW15599; MVS Scheduler with APRA  
0212236; TCP/IP Version 3 Release 1  
or higher

### General

#### • Printer Series Supported

##### 3235-010 DIMM

HP LaserJet™ 4050, 8000, 8100 and 8150  
printers (Works with HP's J31xx Jetdirect  
Cards only)

##### 3235-021 DIMM

HP LaserJet™ 4100, 4200, 4300, and 4100  
MFP printers

##### 3235-031 DIMM

HP Color LaserJet™ 3700, 4600 and 5500  
printers

#### 3235-041 DIMM

HP LaserJet™ 9000, 9055, 9065 and 9000  
MFP printers

#### 3235-051 Flash


HP Color LaserJet™ 4650 printer

#### • Configuration

Front control panel configuration  
Web browser configuration for 4200, 4300,  
3700, 4600, 5500, 9055 and 9065 printers.

#### • Printer

5 Mbytes RAM required  
PCL 5e or PCL 5c

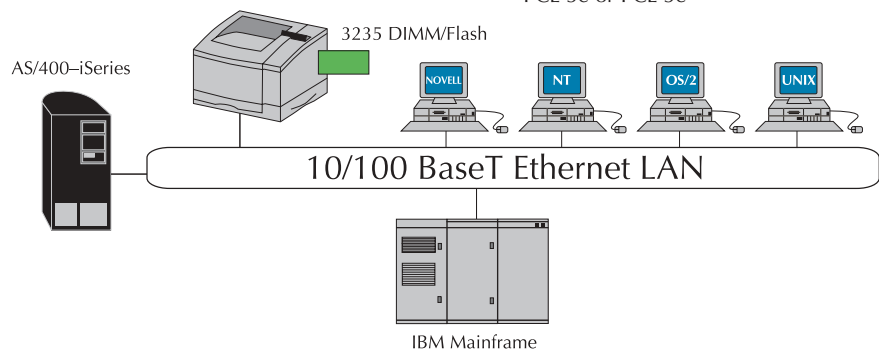

## Features

- Host to LAN printing
- Edge-to-edge printing
- Offloading of data conversion
- Page offset functions
- Supports over 100 AFP/IPDS fonts
- Configured through browser

## Benefits

- Both AFP/IPDS host printing and standard LAN printing can be accomplished in an Ethernet environment. Eliminates the expense of a dedicated host AFP/IPDS printer.
- Host documents requiring edge-to-edge printing can be printed on select HP LaserJet printers.
- Increased speed is a result of converting EBCDIC data at the printer rather than at the host or PC.
- Provides flexibility in page positioning with no need to modify applications.
- There are more fonts to choose from than other AFP/IPDS interfaces.
- Easy remote configuration through the printers' Web interface.



I-O 3235 IPDS DIMM/Flash

business partner

